


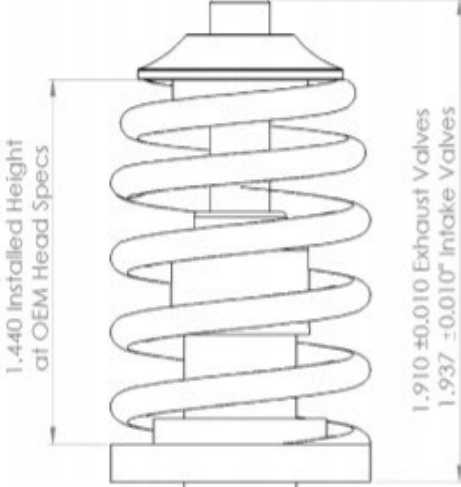

## Beehive Valve Spring Set — 4g63 High Pressure — SS-HP 1030

 <p>1.440 Installed Height at OEM Head Specs</p> <p>1.910 <math>\pm 0.010</math> Exhaust Valves 1.937 <math>\pm 0.010</math> Intake Valves</p>	<h3><u>4G63 High Pressure Beehive Springs</u></h3> <ul style="list-style-type: none"><li>• Rated 11,000rpm at 45psi Without Shimming</li><li>• 325lb/in</li><li>• 1.440" Installed Height at OEM Head Specs</li><li>• 97lbs at 1.440" Installed Height</li><li>• Coil Bind = 0.870"</li><li>• Min Height at Max Lift = 0.910" (for shimming)</li><li>• Recommended Seat Pressure = 1.7x MAP<ul style="list-style-type: none"><li>• Example: 40psi = 54.7psia MAP</li><li>• 54.7psia * 1.7 = 93lbs Seat Pressure</li></ul></li><li>• Use ~17mm ID Shims as-needed</li></ul>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------